

# How to upgrade TP-LINK ADSL Modem Router (TrendChip Solution)

## Notice:


- **Please verify the hardware version of your device for the firmware version. Wrong firmware upgrading may damage your device and void the warranty.**




	Published Date	8/25/2010
	File Size	3.614 MB
	Operating System	Win98SE/Me/NT/2000/XP/2003/Vista/Windows 7/Linux
	Modifications and Bug Fixes	<ul style="list-style-type: none"> <li>• Fix some problems about IPsec.</li> <li>• Fix some bugs about IPoE.</li> <li>• Fix display problem on wireless page.</li> <li>• Add support to No-IP DDNS.</li> <li>• Time can be set manually or sync with PC.</li> </ul>
	Notes	

- **After you downloaded the firmware from TP-LINK website, please use decompression software such as WinZIP or WinRAR to extract the firmware file to a folder;**
- **Do NOT upgrade the firmware via wireless connection;**
- **Do NOT turn off the power or cut down the Ethernet cable during upgrade process;**
- **Please write down all current settings as a backup and enter them manually after upgrading.**
- **Internet Explorer(IE) is recommended to upgrade the firmware.**

**Step 1** Log into the ADSL Modem Router by typing <http://192.168.1.1> in the address bar of the web browser (such as Internet Explorer, Firefox). The **UserName** and **Password** are both **admin** unless you have changed it before.



**Step 2** Click **Maintenance** ->**Firmware** click the **Browse** button to choose the firmware you already extracted in the folder.

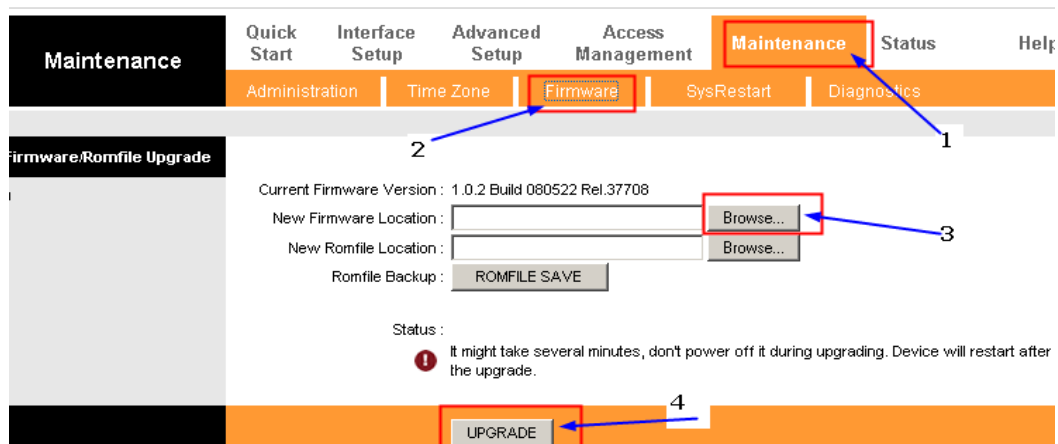


**Step 3** Click the **UPGRADE** button. The device will reboot automatically after the upgrading has been finished. Please wait about 3 minutes.

**Step 4** Click **Status**-> **Device Info**, verify that the router's firmware has been upgraded.



Firmware Version : 1.0.2 Build 080522 Rel.37708  
MAC Address : 00:1d:0f:a7:78:87

**Step 5** You have to restore the device to factory default to make the new functions take effect; Click **Maintenance**->**SysRestart**, choose **Factory Default Settings**, Click **RESTART** button.

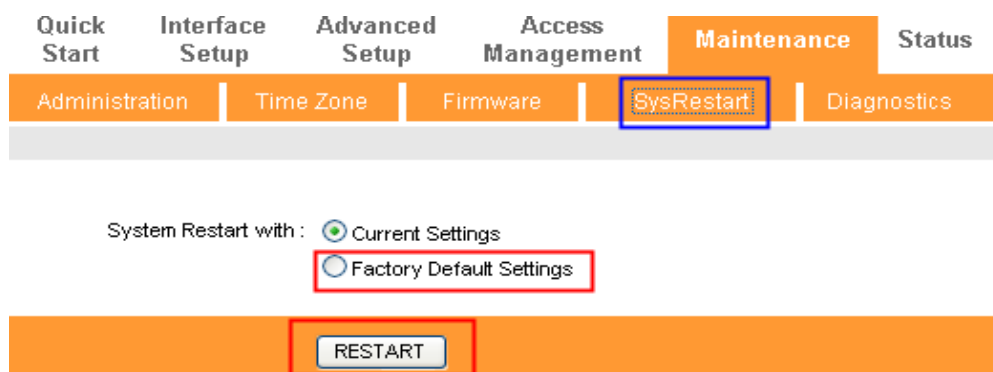

**Step 6** After restoring factory default, please login <http://192.168.1.1> and re-enter the settings you have written down before upgrading.